

Deluxe Floor Machines

175 RPM & 250 RPM

The standard and high speed floor machines are available in a variety of brush sizes and motor horsepower to meet the various needs of floor care professionals. Field-tested to withstand the demanding heavy duty use required for stripping, scrubbing and polishing hard surface flooring.

specifications

MD-10A (10" - 340200)

MD-13A (13" - 355062)

Motor:

1/3 HP, 120V-60 Cycle, 56 Frame

Current: 6.4 AMPS

Gears: 2 Idler

Brush Speed: 175 RPM

Transport Wheels: 3"

MD-13B (13" - 358916)

MD-15B (15" - 355011)

Motor:

1/2 HP, 120V-60 Cycle, 66 Frame

Current: 8 AMPS

Gears: 2 Idler

Brush Speed: 175 RPM

Transport Wheels:

3" - MD-13B; 5" - MD-15B

MD-15C (15" - 351946)

MD-17C (17" - 355054)

Motor:

3/4 HP, 120V-60 Cycle, 66 Frame

Current: 11.0 AMPS

Gears: 3 Idler

Brush Speed: 175 RPM

Transport Wheels: 5"

MD-15D (15" - 355046)

MD-17D (17" - 351954)

MD-20D (20" - 351962)

MD-21D (21" - 360422)

Motor:

1 HP, 120V-60 Cycle, 66 Frame

Current: 13.2 AMPS

Gears: 3 Idler

Brush Speed: 175 RPM

Transport Wheels: 5"

MD-20E (20" - 357073)

MD-21E (21" - 364126)

MD-24E (24" - 351938)

Motor:

1 1/2 HP, 120V-60 Cycle,

66 Frame; Dual Capacitor

Current: 15 AMPS

Gears: 3 Idler

RPM: 175

Transport Wheels:

MD20E & MD21E- 5"; MD24E- 4"

MH-17E (17" - 358010)

MH-20E (20" - 358029)

Motor:

1 1/2 HP, 120V-60 Cycle,

66 Frame; Dual Capacitor

Current: 15 AMPS

Gears: 3 Idler

Brush Speed: 250 RPM

Transport Wheels: 5"

Optional: Solution Tank (334898)

Oversize Handle Grips

For operator's comfort.

Flexible Dual Triggers

Left or right hand operation, non-conductive with built-in safety lock-out to prevent to prevent accidental startup.

Heavy-Duty Switch

Set in a die cast aluminum switch box, which won't chip or rust.

50 Ft Power Cord

3-Wire grounded with water resistant jacket.

4 Gallon Solution Tank (Optional)

Dispenses liquid for scrubbing and polishing. (334898)

All Steel Gear System*

Triple planetary, permanently, lubricated with specially designed flex coupler to guard against possible motor damage when under load.



Steel Clamp Lever

Adjusts handle position.

Aluminum Apron

For added strength and rigidity, also shields the transport wheels to prevent damage.

Non-Marring Bumpers

Prevents damage to furniture and walls.

Wheel Support System

Extra heavy reinforced six point cast aluminum.



* Except MD-10A and MD-13A



MD-15



MD-20




MD-24



MD-13

MD-10

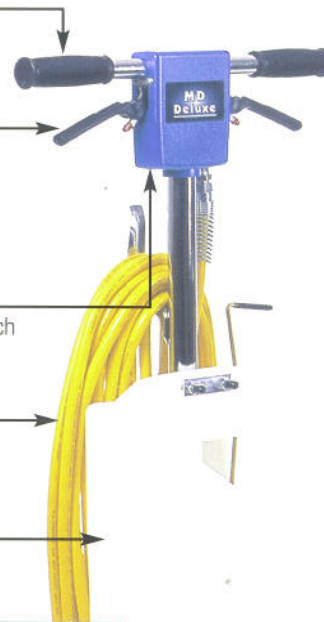

MD-17 w/Optional Solution Tank