

specifications

MTHC-16E LR (464317)

Bowl Size: 16"
Motor:
 1 1/2 HP, 120V 60 Cycle
Current: 12.5 AMPS
Motor Speed: 1760 RPM
Power Cord:
 30 Ft, 12/3 wire grounded
Transport Wheels: 6"

MTHC-16E HR (457795)

Bowl Size: 16"
Motor:
 1 1/2 HP, 120V 60 Cycle
Current: 15.0 AMPS
Motor Speed: 3450 RPM
Power Cord:
 30 Ft, 12/3 wire grounded
Transport Wheels: 6"

MTHC-20J STD (499579)

Bowl Size: 20"
Motor:
 3 HP, 208/230V 60 Cycle
Current: 14.0 AMPS
Motor Speed: 3450 RPM
Power Cord:
 50 Ft, 12/3 wire grounded
 w/20 Amp Twist lock plug
Transport Wheels: 6"



Unique changeable heads are easy to install and remove, adding to the machine's versatility.



Multi-Purpose Dry

This multi-purpose machine is designed for surfacing concrete floors, restoring or preparing wood decks and hardwood floors.

Unique belt drive, three-head system is designed for smooth operation with superior results.

Counter-rotating head makes this machine easy to operate and control with no sliding.

Flexible Startup Trigger (16" Only)

Non-conductive with safety lock-out to prevent accidental startup. Operator activates the machine with a gentle squeeze.

Heavy Duty Switch (16")

Set in steel switch box with a 15 AMP circuit breaker.

Handle and Frame


Constructed of heavy-duty steel for strength and durability. The handle has a quick disconnect for transport.

Heavy-Duty Motor with Dual Capacitors

The 16" is equipped with 1 1/2 HP motor and 20" with a 3 HP motor.

Adjustable Bottom Dust Skirt

Provides dust containment during operation.

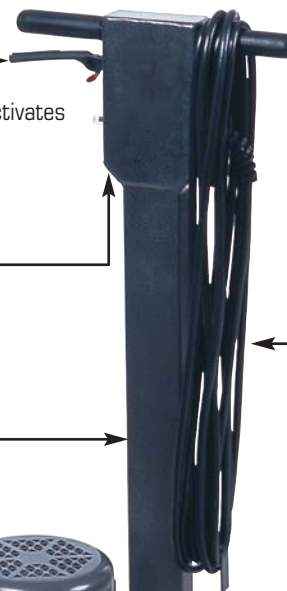

Heavy-Duty 3 Wire Grounded Power Cord

The 16" machine is equipped with a 30 ft 12/3 power cord. The 20" is equipped with a 50 ft 12/3 with a 20 AMP twist lock plug power cord

6" Transport Wheels

Outer Bowl w/Lift Handles and Vacuum Port

Made of spun steel with vacuum ports and the inner bowl of cast aluminum.



MTHC-16E STD