

6280 Commander®

HYDRAULIC WALK-BEHIND SCRAPER


6280-AUS, 6280-EUR, 6280-JPN, 6280-UK



6280 Specifications

Width	17.75"	45 cm
Max. Height	46"	117 cm
Height (handle folded)	30"	76 cm
Max. Length	51"	130 cm
Length (handle folded)	29"	74 cm
Weight	425 lb	192.8 kg
Removable Weight	47 lb front, 43 lb side	21.3 kg front, 19.5 kg side
Weight (machine only)	335 lb	152 kg
Speed	10-45 ft/min	3.0-13.7 m/min
RPM	3450/2875	
Voltage	115/230	
Frequency	60/50 Hz	
HP	1.5	1.12 kW
Amps (full load)	13/7.5	

Meets the requirements of the Machine Directive 2006/42/EC and EMC Directive 2004/108/EC. It is CE marked.

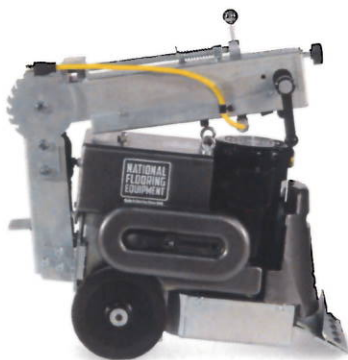

Features

The Commander removes the worst of today's soft goods, such as glued-down floors, gummy commercial carpet, VCT, sheet vinyl, rubber tile, linoleum, indoor and outdoor sport surfaces, roofing material, and more. Its compact design makes it ideal for use in confined spaces, while the side slide weights add extra head pressure when forward and improved traction when moved over the back wheels.

- A. Ergonomically designed, adjustable-position hand grips; hydraulic forward drive; self-propelled reverse drive; variable speed, 10 to 45 feet per minute; manual drive system for throttle/speed control and smooth transitions
- B. Six handle positions for work under counters and other confined areas; collapses to save space during transport and storage
- C. Self-contained, limited-maintenance hydraulic fluid
- D. Tie-down bail
- E. Secure-mount side slide weights adjust scraper-head pressure; slide the weights back to increase weight over travel wheels
- F. New rounded front-weight design better deflects loose material away from machine during use
- G. Adjustable, self-cleaning, industrial-grade, siped wheels for improved traction over smooth or slippery surfaces; clip-pin removal allows for easy nonpowered maneuvering
- H. Motor equipped with thermal-overload-protection circuit breaker that protects against strain or electrical overload
- I. Oscillating action rotates the cutting blade to cut through a range of materials over various substrates; extends life cycle of machine while reducing maintenance costs
- J. Transport-wheel rack hanger on back of 6280
- K. Adjustable wheel scrapers prevent material buildup during operation
- L. Clip in pins allow for easy non-powered maneuvering



6280-299



Included with the 6280

- 6280-299: Front-wheel assembly
- 148: 5" x 6" standard blade
- 6258: 3" x 12" self-scoring blade
- 6286: 3" x 10" heavy-duty blade
- 7050-200: 3" x 6" premium blade
- 7050-202: 3" x 10" premium blade
- 6280-401B: 7/32 t-handle wrench
- Instruction manual
- One-year manufacturer's warranty on parts and labor

Online help at training.nationalequipment.com

**NATIONAL
FLOORING
EQUIPMENT**

Made in America Since 1968

nationalequipment.com | Patent information at nationalequipment.com/patents | 800.245.0267

U/S